



Holland Air Pumps bv®

ALMATEC AD32 - 1 1/4" Metal Pump



MAX FLOW RATE: 150 LPM (39.6 GPM)
MAX PRESSURE: 7 BAR (100 PSI)
MAX DIAMETER SOLIDS: 12 mm (0.47")
MAX SUCTION LIFT CAPABILITY:
 2 m (6.6') Dry, 9 m (29.5') Wet

WETTED HOUSINGS

Material	Ship Wt
Stainless Steel 316	13 kg (28.6 lbs)
Stainless Steel polished	13 kg (28.6 lbs)




NON-WETTED HOUSINGS

Description	Material
Center Section	PE CONDUCTIVE
Air Valve	PETP

ELASTOMER OPTIONS

Material	Temperature limits
EPDM™	-51.1 (-60) to +137.8 (+280) °C (F°)
PTFE	+4.4 (+40) to +104.4 (+220) °C (F°)
NBR	-12.2 (+10) to +82.2 (+180) °C (F°)

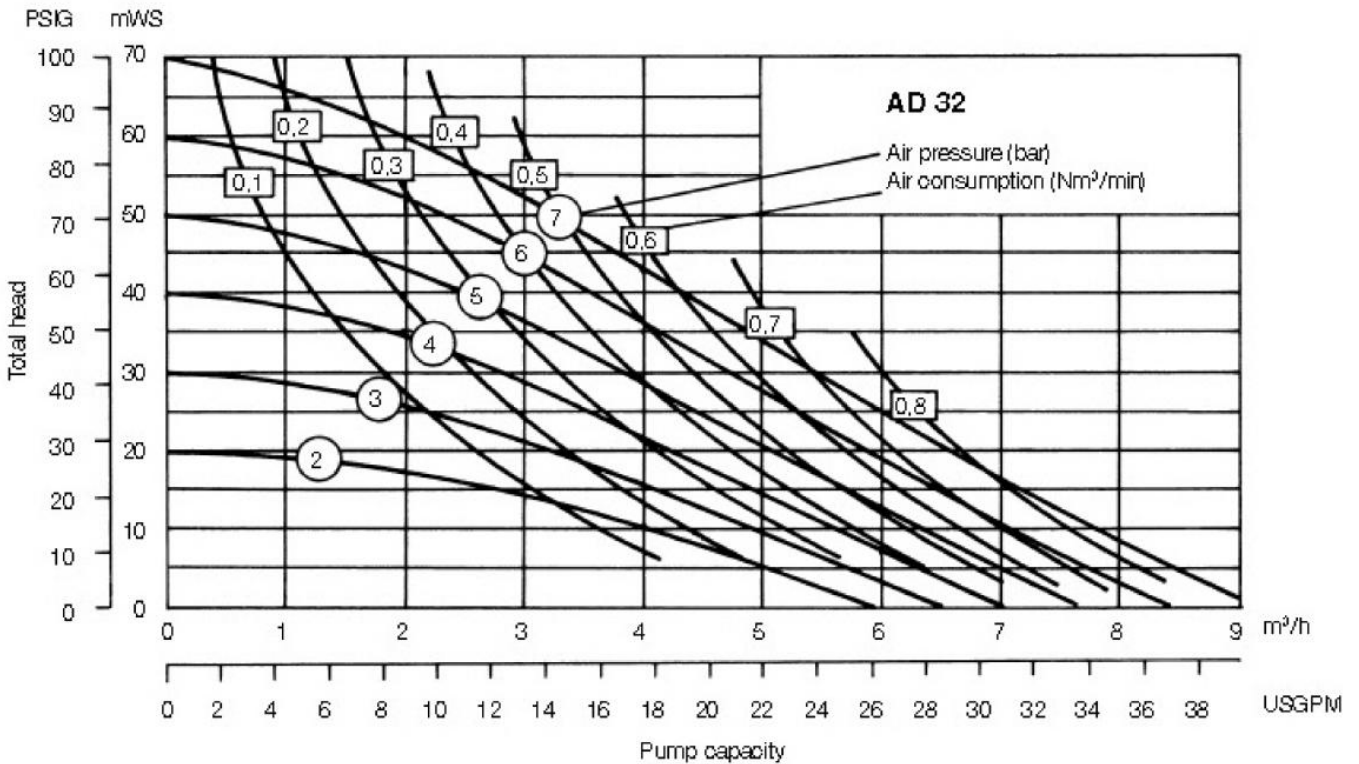

WILDEN ALMATEC®

HOLLAND AIR PUMPS BV

De Scheper 260, NL-5688 HP Oirschot, The Netherlands
 T +31 499 551000, F +31 499 551005
 E-mail: info@hollandairpumps.nl