



Holland Air Pumps bv®

# ALMATEC AD50 – 2” Metal Pump



**MAX FLOW RATE:** 400 LPM (105.7 GPM)  
**MAX PRESSURE:** 7 BAR (100 PSI)  
**MAX DIAMETER SOLIDS:** 14 mm (0.55")  
**MAX SUCTION LIFT CAPABILITY:**  
 3 m (9.8') Dry, 9 m (29.5') Wet

## WETTED HOUSINGS


<b>Material</b>	<b>Ship Wt</b>
Stainless Steel 316	29 kg (63.9 lbs)
Stainless Steel polished	29 kg (63.9 lbs)

## NON-WETTED HOUSINGS

<b>Description</b>	<b>Material</b>
Center Section	PA
Air Valve	PETP

## ELASTOMER OPTIONS

<b>Material</b>	<b>Temperature limits</b>
EPDM™	-51.1 (-60) to +137.8 (+280) °C (F°)
PTFE	+4.4 (+40) to +104.4 (+220) °C (F°)
NBR	-12.2 (+10) to +82.2 (+180) °C (F°)

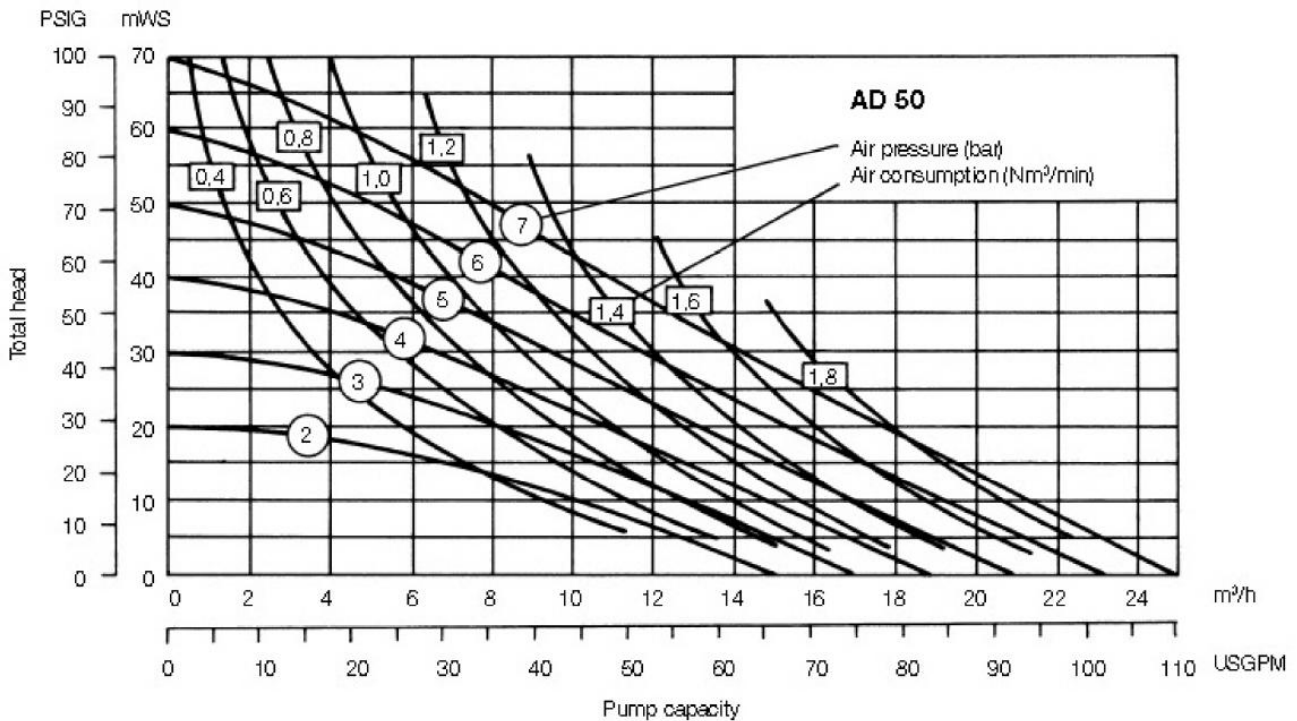

**WILDEN** ALMATEC®

### HOLLAND AIR PUMPS BV

De Scheper 260, NL-5688 HP Oirschot, The Netherlands  
 T +31 499 551000, F +31 499 551005  
 E-mail: info@hollandairpumps.nl