



Holland Air Pumps bv®

ALMATEC AH15 – 3/4" Plastic Pump



WETTED HOUSINGS

Material
PE UHMW

Ship Wt
11 kg (24.3 lbs)

NON-WETTED HOUSINGS

Description
Center Section
Air Valve



Material
PA
PETP

ELASTOMER OPTIONS

Material
EPDM™
PTFE
NBR

Temperature limits
-51.1 (-60) to +137.8 (+280) °C (F°)
+4.4 (+40) to +104.4 (+220) °C (F°)
-12.2 (+10) to +82.2 (+180) °C (F°)

MAX FLOW RATE: 70 LPM (18.5 GPM)
MAX PRESSURE: 14 BAR (203 PSI)
MAX DIAMETER SOLIDS: 4 mm (0.16")
MAX SUCTION LIFT CAPABILITY:
3 m (9.8') Dry, 9.5 m (31.2 ') Wet

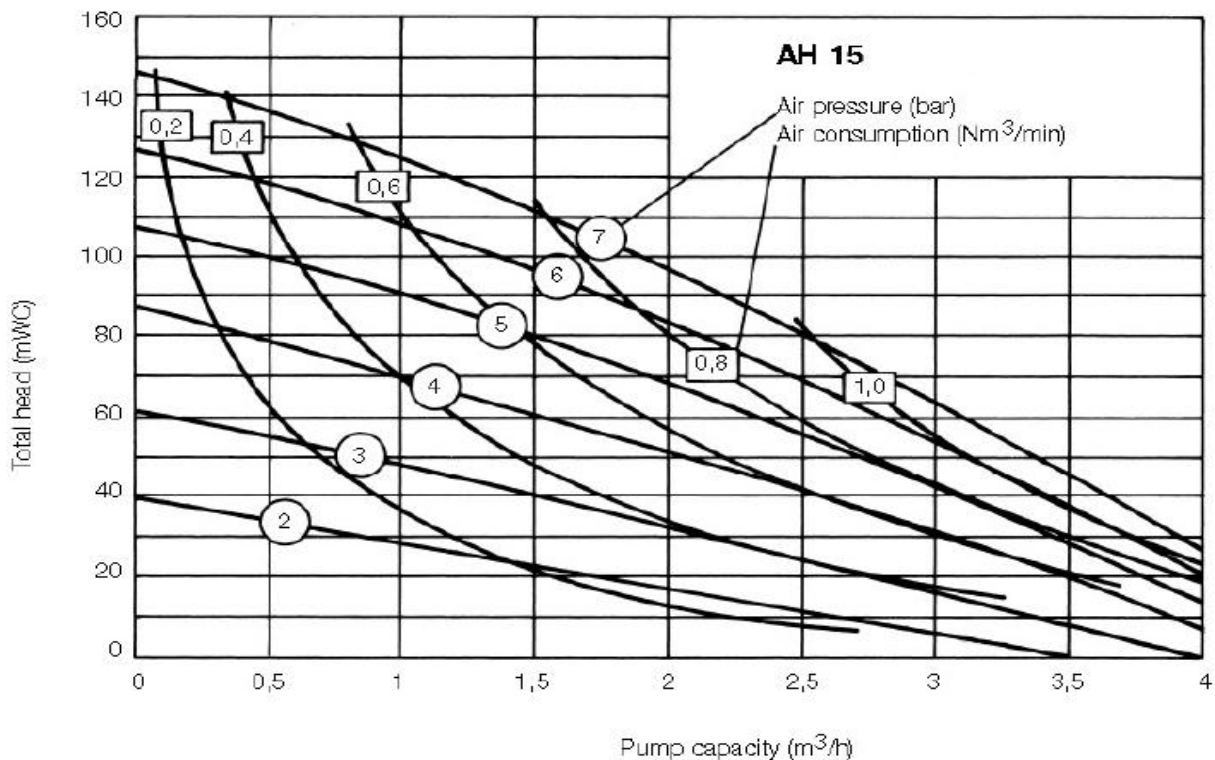

WILDEN ALMATEC®

HOLLAND AIR PUMPS BV

De Scheper 260, NL-5688 HP Oirschot, The Netherlands
T +31 499 551000, F +31 499 551005
E-mail: info@hollandairpumps.nl