



Holland Air Pumps bv®

# ALMATEC B20 – 1” Tri-Clamp Metal Pump



## WETTED HOUSINGS

**Material**  
SS 316 L

**Ship Wt**  
12 kg (27 lbs)



## NON-WETTED HOUSINGS

**Description**  
Center Section  
Air Valve



**Material**  
PE CONDUCTIVE  
PETP

**MAX FLOW RATE:** 58 LPM (15.32 GPM)  
**MAX PRESSURE:** 7 BAR (100 PSI)  
**MAX DIAMETER SOLIDS:** 3 mm (0.12")  
**MAX SUCTION LIFT CAPABILITY:**  
2 m (6.6') Dry, 9 m (29.5 ') Wet

## ELASTOMER OPTIONS

**Material**  
EPDM™ (FDA)  
PTFE

**Temperature limits**  
-51.1 (-60) to +137.8 (+280) °C (F°)  
+4.4 (+40) to +104.4 (+220) °C (F°)

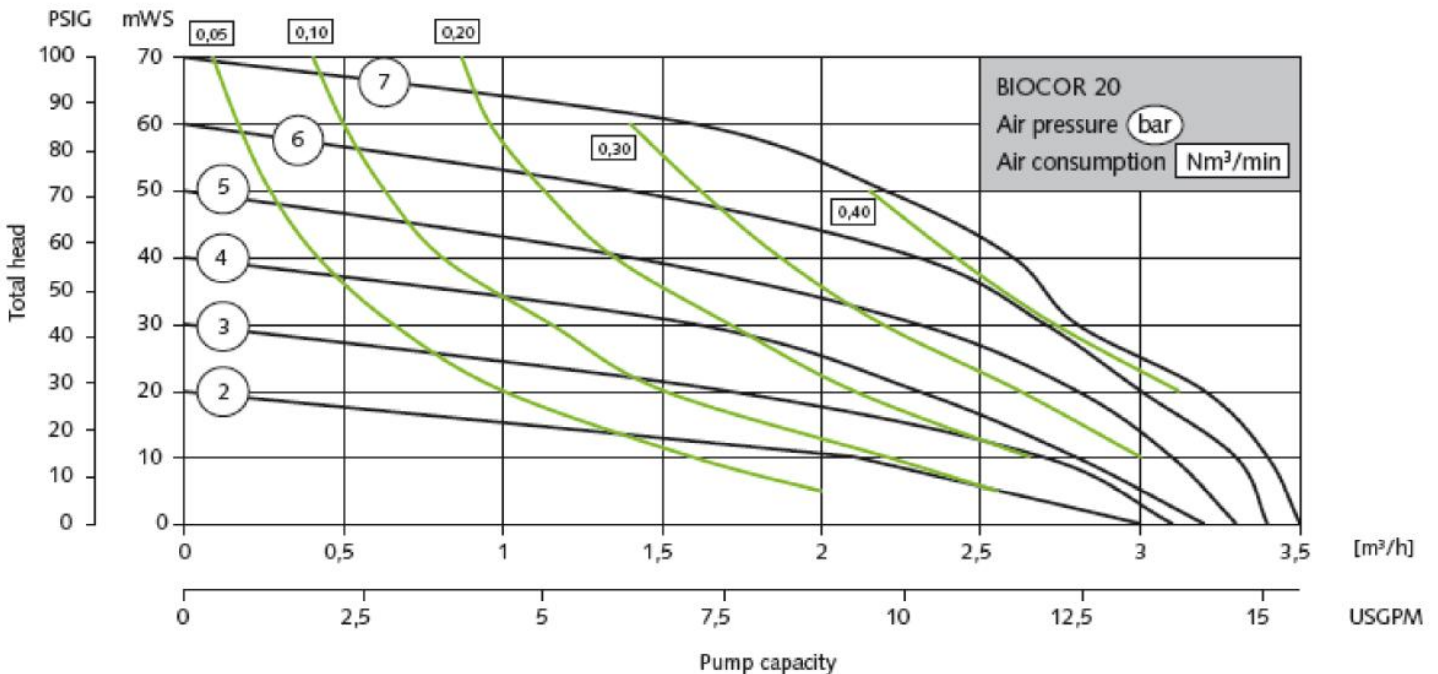

**WILDEN** ALMATEC®

## HOLLAND AIR PUMPS BV

De Scheper 260, NL-5688 HP Oirschot, The Netherlands  
T +31 499 551000, F +31 499 551005  
E-mail: info@hollandairpumps.nl