



Holland Air Pumps bv®

ALMATEC B20 – ¼” Metal Pump



WETTED HOUSINGS

Material
SS 316 L

Ship Wt
12 kg (27 lbs)



NON-WETTED HOUSINGS

Description
Center Section
Air Valve



Material
PE CONDUCTIVE
PETP

MAX FLOW RATE: 58 LPM (15.32 GPM)
MAX PRESSURE: 7 BAR (100 PSI)
MAX DIAMETER SOLIDS: 3 mm (0.12")
MAX SUCTION LIFT CAPABILITY:
2 m (6.6') Dry, 9 m (29.5 ') Wet

ELASTOMER OPTIONS

Material
EPDM™ (FDA)
PTFE

Temperature limits
-51.1 (-60) to +137.8 (+280) °C (F°)
+4.4 (+40) to +104.4 (+220) °C (F°)

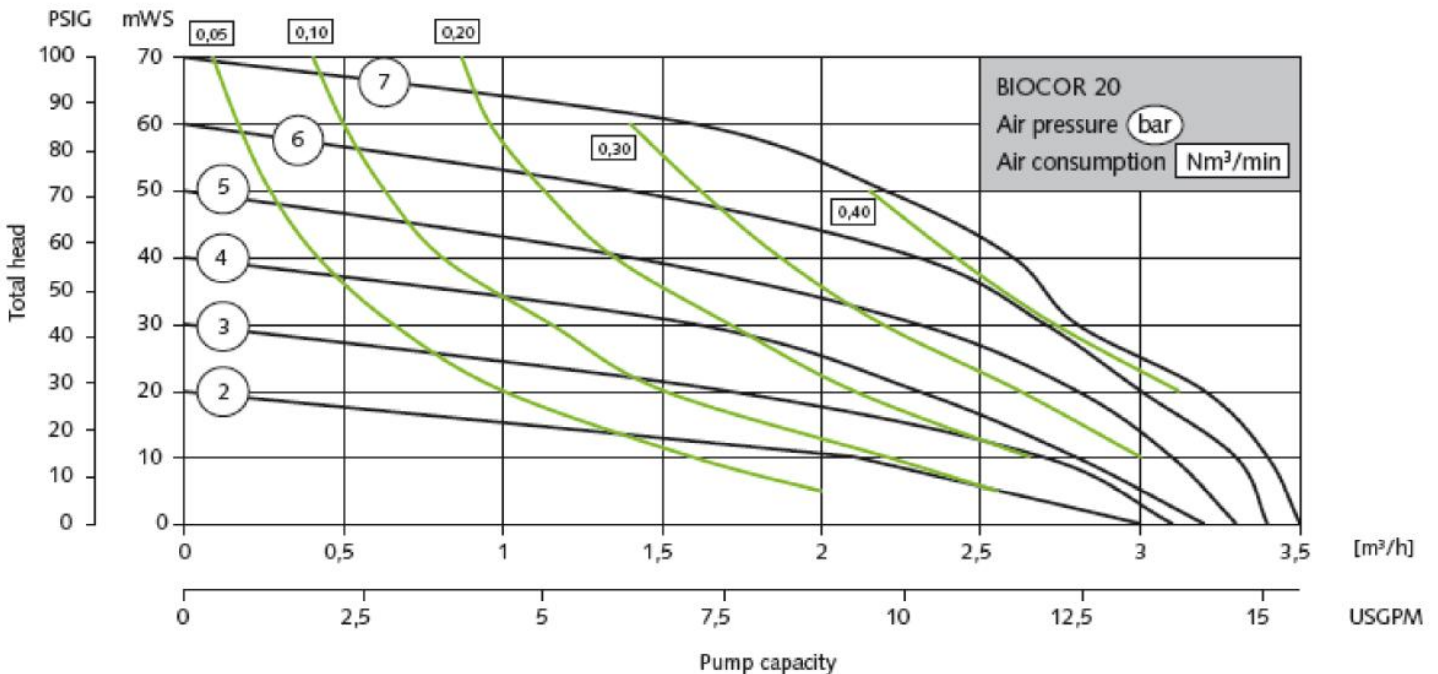

WILDEN ALMATEC®

HOLLAND AIR PUMPS BV

De Scheper 260, NL-5688 HP Oirschot, The Netherlands
T +31 499 551000, F +31 499 551005
E-mail: info@hollandairpumps.nl