



Holland Air Pumps bv®

# ALMATEC E10 – 3/8” Plastic Pump



## WETTED HOUSINGS

<b>Material</b>	<b>Ship Wt</b>
PTFE	5 kg (11 lbs)
PTFE conductive	5 kg (11 lbs)



## NON-WETTED HOUSINGS

<b>Description</b>	<b>Material</b>
Center Section	PTFE, PTFE conductive
Air Valve	PETP

## ELASTOMER OPTIONS

<b>Material</b>	<b>Temperature limits</b>
EPDM™	-51.1 (-60) to +137.8 (+280) °C (F°)
PTFE	+4.4 (+40) to +104.4 (+220) °C (F°)
NBR	-12.2 (+10) to +82.2 (+180) °C (F°)

**MAX FLOW RATE:** 23 LPM (6 GPM)  
**MAX PRESSURE:** 7 BAR (100 PSI)  
**MAX DIAMETER SOLIDS:** 3 mm (0.12")  
**MAX SUCTION LIFT CAPABILITY:**  
 2 m (6.6') Dry, 9 m (29.5') Wet

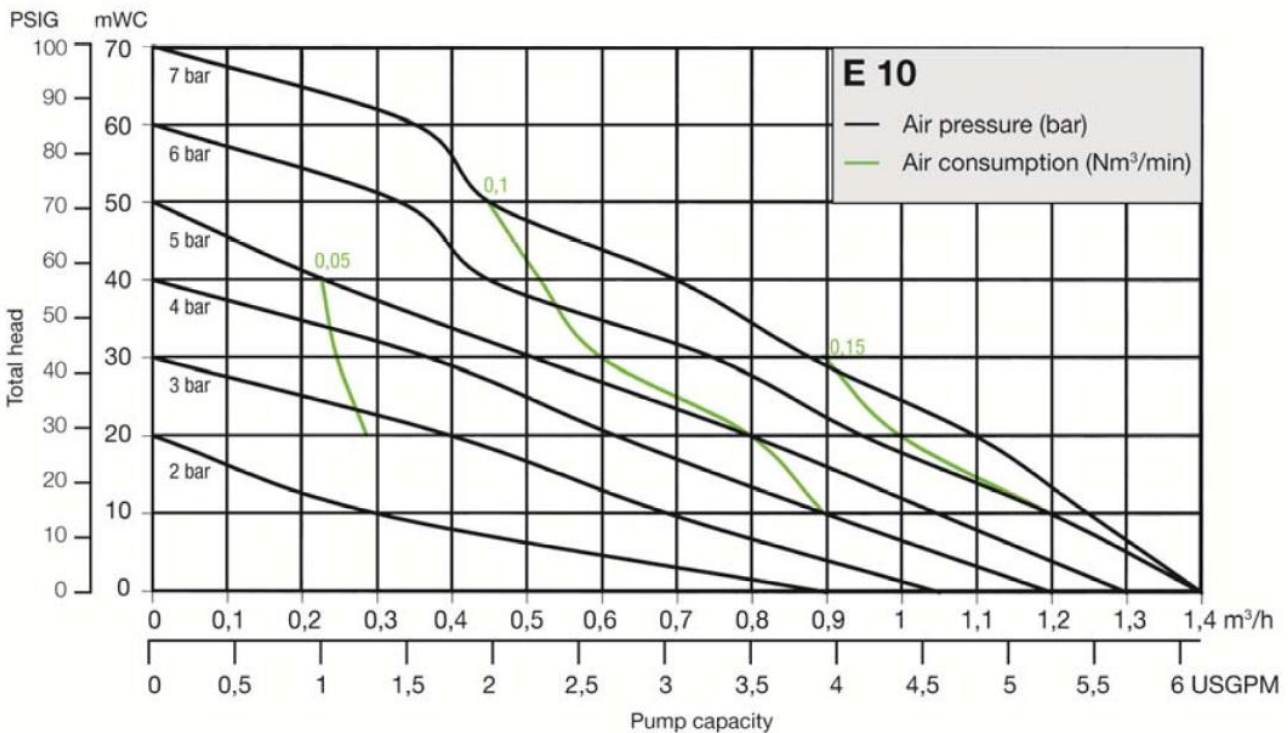

**WILDEN** ALMATEC®

### HOLLAND AIR PUMPS BV

De Scheper 260, NL-5688 HP Oirschot, The Netherlands  
 T +31 499 551000, F +31 499 551005  
 E-mail: info@hollandairpumps.nl