



Holland Air Pumps bv®

ALMATEC E40 – 1½” Plastic Pump



WETTED HOUSINGS

Material
PE conductive
PTFE conductive

Ship Wt
34 kg (75 lbs)
69 kg (152 lbs)



NON-WETTED HOUSINGS

Description
Center Section
Air Valve



Material
PE conductive, PTFE conductive
PETP

ELASTOMER OPTIONS

Material
EPDM™
PTFE
NBR

Temperature limits
-51.1 (-60) to +137.8 (+280) °C (F°)
+4.4 (+40) to +104.4 (+220) °C (F°)
-12.2 (+10) to +82.2 (+180) °C (F°)

MAX FLOW RATE: 330 LPM (88 GPM)
MAX PRESSURE: 7 BAR (100 PSI)
MAX DIAMETER SOLIDS: 9 mm (0.35")
MAX SUCTION LIFT CAPABILITY:
5 m (16.4') Dry, 9.5 m (31.2') Wet

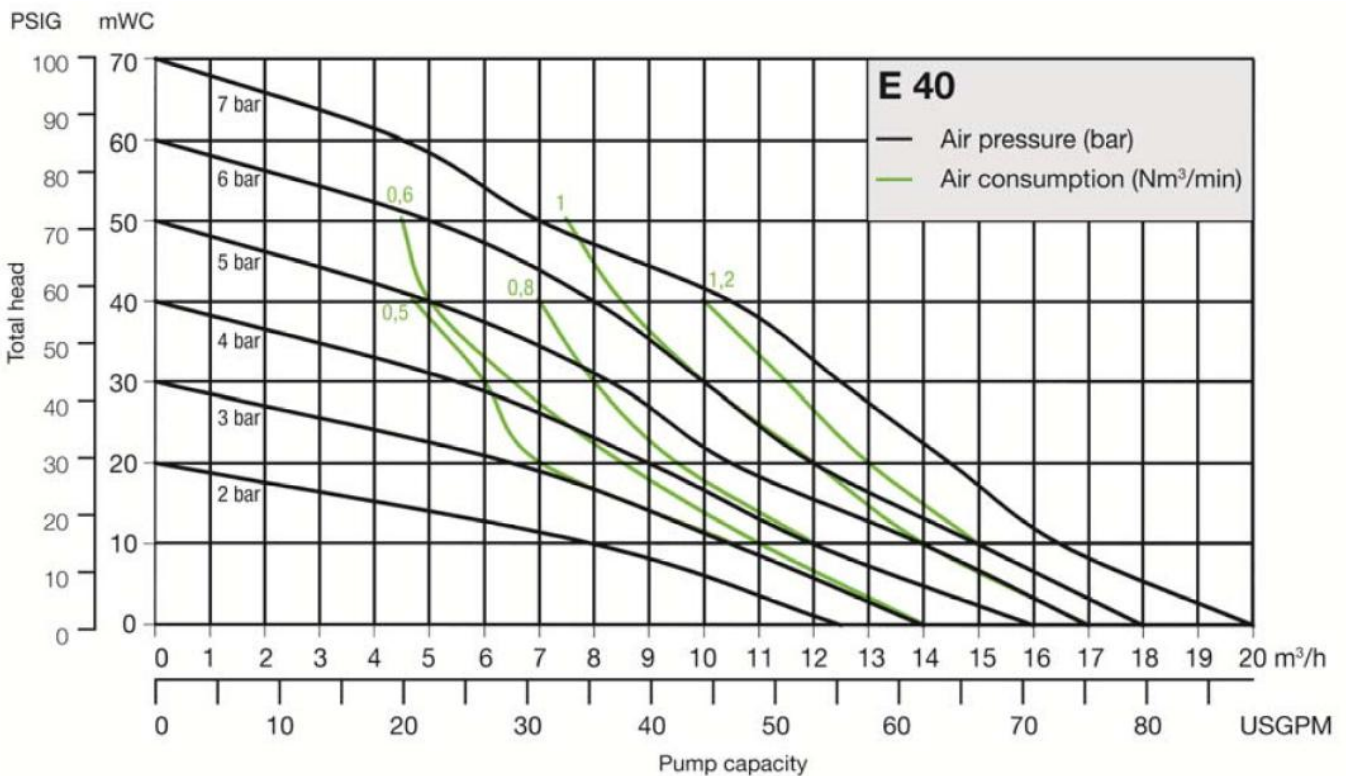

WILDEN ALMATEC®

HOLLAND AIR PUMPS BV

De Scheper 260, NL-5688 HP Oirschot, The Netherlands
T +31 499 551000, F +31 499 551005
E-mail: info@hollandairpumps.nl