



Holland Air Pumps bv®

ALMATEC FUTUR 50 – 1” Plastic Pump



WETTED HOUSINGS

Material
PTFE/PE
PE

Ship Wt
8.8 kg (19.4 lbs)
5.8 kg (12.7 lbs)

NON-WETTED HOUSINGS

Description
Center Section
Air Valve



Material
PTFE-TFM, UPPE
PETP

MAX FLOW RATE: 50 LPM (13.2 GPM)
MAX PRESSURE: 6 BAR (87.02 PSI)
MAX SUCTION LIFT CAPABILITY:
3.5 m (11.4') Dry, 9 m (29.5 ') Wet

ELASTOMER OPTIONS

Material
PTFE

Temperature limits
+4.4 (+40) to +104.4 (+220) °C (F°)

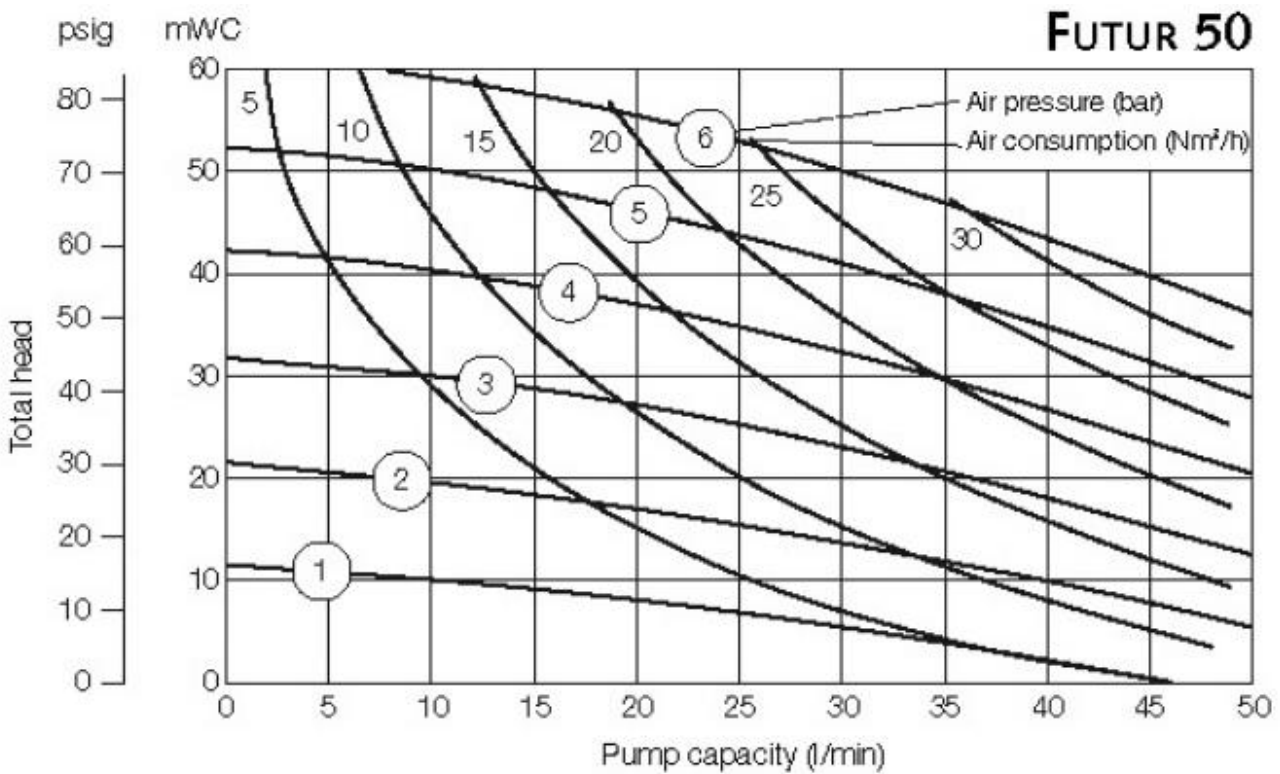

WILDEN ALMATEC®

HOLLAND AIR PUMPS BV

De Scheper 260, NL-5688 HP Oirschot, The Netherlands
T +31 499 551000, F +31 499 551005
E-mail: info@hollandairpumps.nl