



Holland Air Pumps bv®

ALMATEC FUTUR 20 - 1/2" Plastic Pump



WETTED HOUSINGS

Material

PTFE/PE

PTFE

PE

Ship Wt

4.2 kg (9.26 lbs)

5.0 kg (11.02 lbs)

2.8 kg (6.17 lbs)

NON-WETTED HOUSINGS

Description

Center Section

Air Valve

Material

PTFE-TFM, UPPE

PETP

MAX FLOW RATE: 20 LPM (5.28 GPM)

MAX PRESSURE: 6 BAR (87.02 PSI)

MAX SUCTION LIFT CAPABILITY:

2.5 m (8.2') Dry, 9 m (29.5 ') Wet



ELASTOMER OPTIONS

Material

PTFE

Temperature limits

+4.4 (+40) to +104.4 (+220) °C (F°)

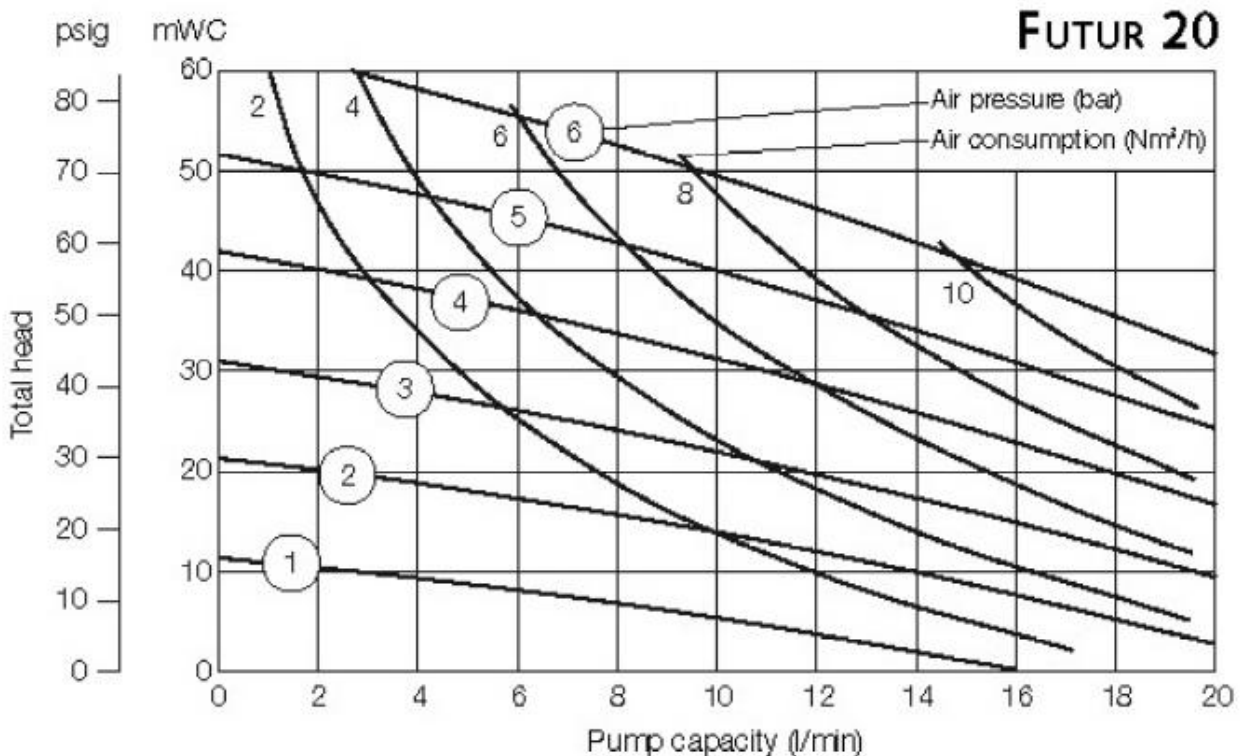

WILDEN ALMATEC®

HOLLAND AIR PUMPS BV

De Scheper 260, NL-5688 HP Oirschot, The Netherlands

T +31 499 551000, F +31 499 551005

E-mail: info@hollandairpumps.nl