



Holland Air Pumps bv®

ALMATEC FUTUR 50 – 1” Plastic Pump



WETTED HOUSINGS

Material	Ship Wt
PTFE/PE	8.8 kg (19.4 lbs)
PE	5.8 kg (12.7 lbs)



NON-WETTED HOUSINGS

Description	Material
Center Section	PTFE-TFM, UPPE
Air Valve	PETP

ELASTOMER OPTIONS

Material	Temperature limits
PTFE	+4.4 (+40) to +104.4 (+220) °C (F°)

MAX FLOW RATE: 50 LPM (13.2 GPM)
MAX PRESSURE: 6 BAR (87.02 PSI)
MAX SUCTION LIFT CAPABILITY:
 3.5 m (11.4') Dry, 9 m (29.5 ') Wet

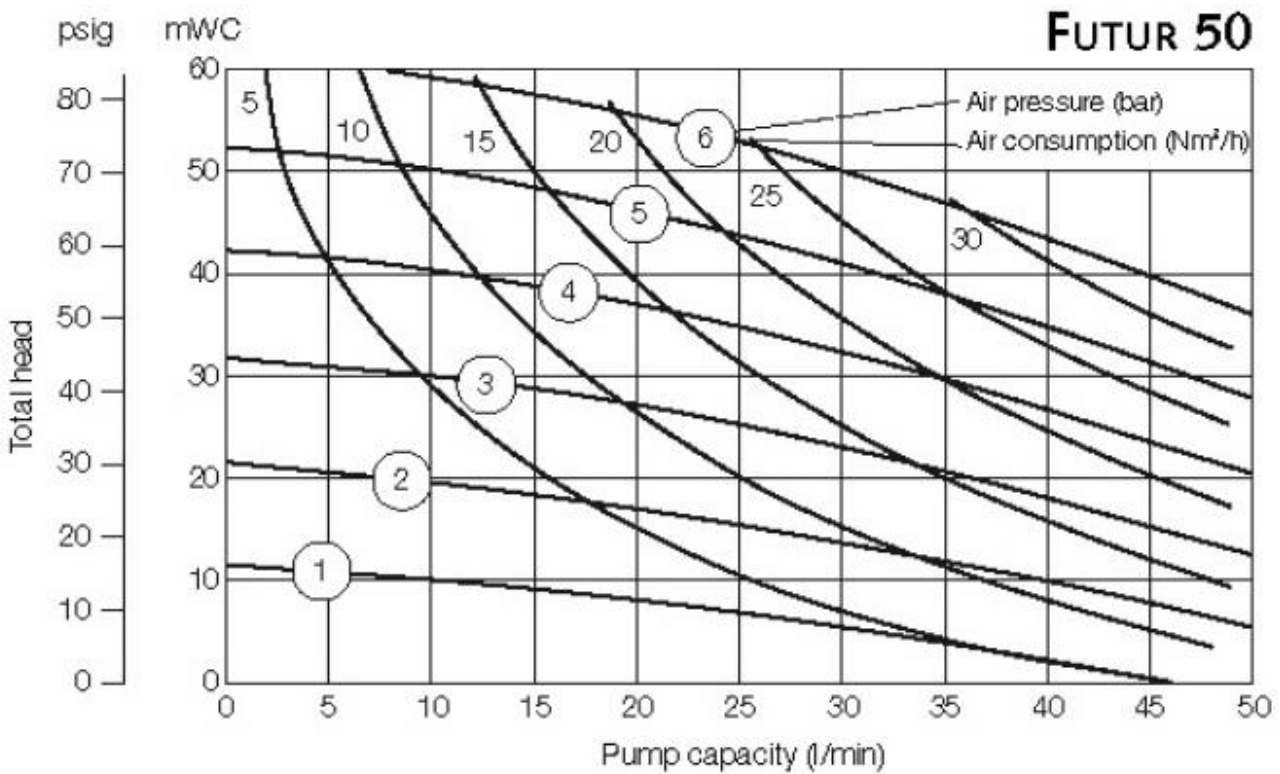

WILDEN ALMATEC®

HOLLAND AIR PUMPS BV

De Scheper 260, NL-5688 HP Oirschot, The Netherlands
 T +31 499 551000, F +31 499 551005
 E-mail: info@hollandairpumps.nl